

LBHDV series Single-Core-Fiber Multimeter (Video/Audio/Data) 4Ch HD TVI/CVI/AHD VideoAudioData fiber converter system

Lightem LBHDV series 4-Ch TVI/CVI/AHD to Fiber Converters is universal type supporting High Definition Analog video format HD-TVI / HD-CVI / AHD, can simultaneously transmit 4 channels video and 1-ch RS485 over one core multimode or single-mode optical fiber. It also supports the regular analog video format such as PAL / NTSC / SECAM , it is a kind of universal fiber transmission solution/ product for CCTV analog video/data signals. Devices are available for either standalone or rack-mount installation, which is suitable for different working environment. Electronic and optical adjustments are never required. LED indicators are provided for instantly monitoring system status.




FEATURES

- Lossless, non-compression real time transmission.
- Automatically identify formats of input video :AHD/TVI/CVI/PAL/NTSC/SECAM
- Support 720P/25/30/50Hz , 960P/25/30Hz,1080P/30Hz
- Advanced lightning protection design ,support 5.7KV lightning protection
- Through LED indicators to inform its functional mode
- Industrial wide range of operating temperature
- Stand-alone or Rack-mounted, simple installation.

APPLICATIONS

- HD Video transmissions
- TV Broadcast System

LOGICAL DIAGRAM

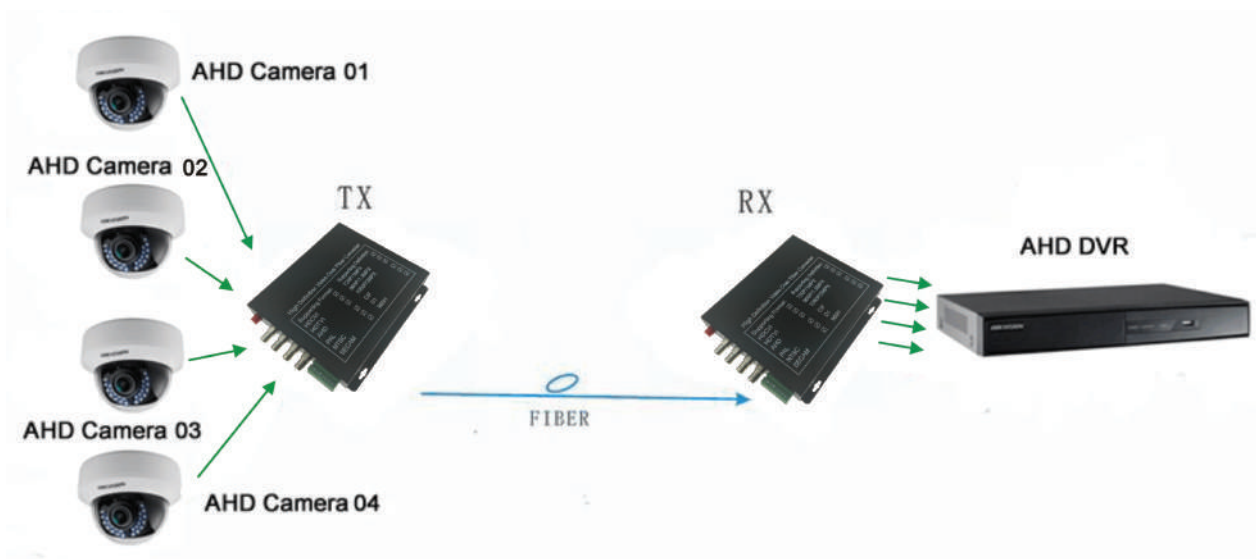

SPECIFICATIONS

Optical	
Wavelength	WDM:1310nm/1550nm
Output Power	-8~3dBm
Optic fiber	50/125u multimode, 62.5/125u multimode, 9/125u single mode
Rx sensitivity	-26dBm
Optical connector	FC, ST, SC (optional)
Distance	0~550M (MM) / 0~80KM (SM) (Default distance is 20Km)
Video	
Number of Channels	4
Input/output impedance	75 Ohm (unbalance)
Standard video input/output voltage	1.0Vp-p
Video Bandwidth	50MHz
Sampling Bandwidth	8bit
Sampling Frequency	108MHz
Signal to noise ratio	>67dB
Rise and Fall time	<0.8ns
Optical Signal Intrinsic Jitter	<0.2 UI
Differential Gain	< ±1.5%
Differential Phase	< ±1°
Connector	BNC
Supporting video pixel	1280(H)x720(V)@30Hz/1MPX 1280(H)x720(V)@50Hz/1MPX 1280(H)x960(V)@30Hz/1.3MPX 1920(H)x1080(V)@30Hz/2MPX
Data	
Protocol	Default: RS485 (RS232/RS422 Optional)
Number of channels	1
Connector	9pins Terminal Blocks
Data Rate	0-200Kbps
Directions	Default :Simplex from Rx to Tx (BIDI duplex optional)
Mechanical Structure & Environment	
Power	DC5V 2A
Power Consumption	≤6W
Working Temperature	-15°C ~65°C
Storage Temperature	-40°C ~85°C
Relative Humidity	5%~95% (no condensation)
MTBF	≥ 100000Hours
Dimensions (L x W x H)	174 x 173 x 30 mm
Weight	1.65 kg

ORDERING INFORMATION

0 Channels TVI/CVI/AHD Video	
LBHD0Vyyy-p	0 TVI/CVI/AHD Video (Down)
LBHD0Vyyy-1DU-p	0 TVI/CVI/AHD Video (Down) + 1 Data (Up)
LBHD0Vyyy-4AD-p	0 TVI/CVI/AHD Video (Down) + 4 Audio (Down)
LBHD0Vyyy-4AUD-p	0 TVI/CVI/AHD Video (Down) + 4 Audio (Up/Down)
LBHD0Vyyy-1DU-4AD-p	0 TVI/CVI/AHD Video (Down) + 1 Data (Up) + 4 Audio (Down)
LBHD0Vyyy-1DUD-4AD-p	0 TVI/CVI/AHD Video (Down) + 1 Data (Up/Down) + 4 Audio (Down)
LBHD0Vyyy-1DUD-4AUD-p	0 TVI/CVI/AHD Video (Down) + 1 Data (Up/Down) + 4 Audio (Up/Down)
LBHD0Vyyy-4DUD-4AUD-p	0 TVI/CVI/AHD Video (Down) + 4 Data (Up/Down) + 4 Audio (Up/Down)
xxx	
M02, S20	Multimode-2km, Singlemode 1310-20km
P	S-Standalone, R-Rackmount, T-Transmitter, R-Receiver
-S-T, -S-R, -R-T, -R-R	
4 Channels TVI/CVI/AHD Video	
LBHD4Vyyy-p	4 TVI/CVI/AHD Video (Down)
LBHD4Vyyy-1DU-p	4 TVI/CVI/AHD Video (Down) + 1 Data (Up)
LBHD4Vyyy-4AD-p	4 TVI/CVI/AHD Video (Down) + 4 Audio (Down)
LBHD4Vyyy-4AUD-p	4 TVI/CVI/AHD Video (Down) + 4 Audio (Up/Down)
LBHD4Vyyy-1DU-4AD-p	4 TVI/CVI/AHD Video (Down) + 1 Data (Up) + 4 Audio (Down)
LBHD4Vyyy-1DUD-4AD-p	4 TVI/CVI/AHD Video (Down) + 1 Data (Up/Down) + 4 Audio (Down)
LBHD4Vyyy-1DUD-4AUD-p	4 TVI/CVI/AHD Video (Down) + 1 Data (Up/Down) + 4 Audio (Up/Down)
LBHD4Vyyy-4DUD-4AUD-p	4 TVI/CVI/AHD Video (Down) + 4 Data (Up/Down) + 4 Audio (Up/Down)
yyy	
M01, S20	Multimode-1km, Singlemode 1310-20km
P	S-Standalone, R-Rackmount, T-Transmitter, R-Receiver
-S-T, -S-R, -R-T, -R-R	
Rack Mount Chassis	
LR4U-V	4U Rack Mount Chassis, for 18x 4V Card (total 72Ch Video)