

TELECOM/DATACOM SYSTEM

5Ports 10/100M Industrial UPOE Switch with 4x 10/100M RJ45 @UPOE 70W & 1x 10/100M FX

LIPOF5-4PU-1FX is a 4x 10/100M RJ45 UPOE@70W and 1x 10/100M FX port UPOE switch. It features 3KV network port surge protection which is important for harsh outdoor environment and ensure the reliability of the uninterrupted system.




FEATURES

- 4x 10/100M RJ45 UPOE@70W & 1x 10/100M FX
- Supports IEEE 802.3x flow control for Full-duplex Mode and backpressure for Half-duplex Mode
- Supports IEEE 802.3bt (Max 95W / single port)
- RJ45 Ports AUTO Negotiation/AUTO MDI/MDIX
- Storage Exchange Forwarding Mechanism and 4M Forward Memory
- Standard Desktop design
- Supports Wire-Speed forwarding

SPECIFICATIONS

5 Ports 10/100M Industrial UPOE Switch with 4x 10/100M RJ45 @UPOE 70W & 1x 10/100M FX	
Number of UPOE ports (10/100BaseT) @ 60W	4
Number of 10/100M Fx	1
Power Pin Assignment	1/2 and 3/6, or alternatively over 4/5(+) and 7/8 (-)
Performance Specifications	
Transmission Method	Store-And-Forward
Network Protocol and Standards	IEEE 802.3u
	IEEE 802.3x Flow Control
POE standard	IEEE802.3bt @ 70W (Max 95W / single port)
POE power	70W per port
Environmental	
Operating temperature	-20 ~ 55°C
Storage temperature	-40 ~ 80°C
Operating humidity	5 ~ 95% non condensation
Power Supply	AC 100-240V or DC 48-57V 250W
Power Consumption	Standby<4W, Full Load<240W
LED indicators	Power supply, network status, UPOE status
Physical	
Dimension	118 x 100 x 30mm
Weight	0.5Kg

FUNCTIONAL DIAGRAM

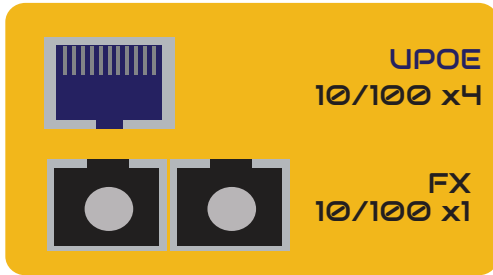

ORDERING INFORMATION

PN	DESCRIPTION
LIP0F5-4PU-1FX-xxxx	5Ports 10/100M Industrial UPOE Switch with 4x 10/100M RJ45 @UPOE 70W & 1x 10/100M FX
xxxx-	MD02- Multimode Duplex SC 2km
	SD20- Singlemode Duplex SC 20km
	SS35- Singlemode Simplex SC Tx/Rx: 1310/1550nm 20km
	SS53- Singlemode Simplex SC Tx/Rx: 1550/1310nm 20km
PEA-52-250	Power adaptor 220VAC~52VDC: 250W