

LFM series RS-232 serial optic fiber MODEM


Lightem LFM series is a RS232 Fiber Modem that signal over Fiber Optics interface,



FEATURES

- Support RS-232 interface
- Asynchronous, point to point, rate up to 120Kbps
- Support 5V Volt input, +14 or -14V Volt output, consumption 2W
- +/- 15kV (Human body model) ESD protection, +/- 8kV contact discharge
- Working wavelength: 850nm(multimode) / 1310nm(singlemode)
- Auto test signal rate, zero delay auto transmit.

APPLICATION

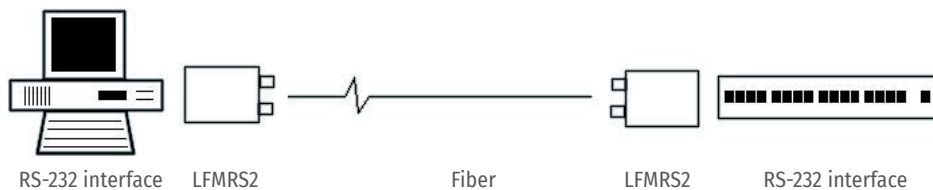

SPECIFICATIONS

Technical	Values
Interface	Support EIA RS-232 standard
Data Rate	0-120Kbps
Transmission Distance	RS232 port 15m, Multimode 2km, Singlemode 20km
Working Temperature	-25°C to 70°C
Interface Type	DB-9 female(RS-232), Multimode: ST/ SC/FC Singlemode FC/SC/ST
Dimensions	115 *90 *25 mm
Weight	230g

ORDERING INFORMATION

P/N	Descriptions
LFMRS2- ABC	(RS-232 Optical Fiber Modem)LB1DCTzzz-p
A	M: Multimode S: Singlemode
B	D: Duplex S: Simplex
C	T: ST S: SC F: FC